



Titanium Series 7GP17CL-3 Low Water Temperature Water Chiller

The Titanium Series 7GP17CL-3 Water Chiller is part of our Performance Plus range of models. It ensures a constant set temperature every time. Suitable for chilling brine down to 1°C or a specified temperature.

Designed and engineered to perform all year round, even in New Zealand's harshest environments; the Titanium Series 7GP17CL-3 unit is made of heavy gauge galvanised steel cabinetry with a polyester powder coat finish which provides superior corrosion resistance. The evaporator coils aluminium fins are epoxy coated giving extra protection in coastal areas where the air is salt-laden. The coil fins are on rifled copper tubes for even better heat transfer.

All 7GP series water chillers are fitted with a titanium tube heat exchanger, as titanium tubes provides superior resistance against corrosion. Due to its high energy efficiency, the Titanium Series 7GP17CL-3 has an extremely low cost of operation.

IDEAL APPLICATION

- Water chilling
- Aquaculture
- Hydroponics
- Food Processing

PERFORMANCE PLUS FEATURES

- Quiet running
- Built in drain tray
- Water flow switch activated
- Titanium tube heat exchangers
- Ozone friendly refrigerants
- Epoxy coated corrosion resistant evaporator coils
- Built in refrigeration safety switches
- Optional electronic reverse cycle de-ice control
- Easy to operate electronic controller with digital display
- TX valve for more efficient low ambient operation
- Compressor has built in internal and external overload

Experience the best in water chiller technology



PERFORMANCE PLUS BENEFITS

- Easy to install and operate
- Low operating costs and high efficiency
- Environmentally friendly
- Durable and long life expectancy
- Engineered and built in New Zealand
- Automatically maintains any set temperature in all weather



Advancing Water Heat Pump Technology SINCE 1980

Titanium Series 7GP17CL-3

Technical Specifications

| | |
|--|-------------------|
| kW output (chilling) *1 | 12 |
| kW output low temp (chilling) *2 | 8.5 |
| kW input | 3.4 |
| Power Supply | 3 Phase + N & E |
| Circuit Breaker - 3 Pole D Curve | 20 amps |
| Nominal compressor run amps | 5.3 |
| Fan full load amps | 0.9 |
| Operating temperature range (fresh water) *3 | 4°C to 35°C |
| Minimum flow rate - litre/second | 1.43 |
| Water connections | 40mm PVC socket |
| Dimensions LxWxH - mm | 1030 x 380 x 1170 |
| Weight - kg | 125 |
| Air volume @ high speed litre/second | 1,100 |
| Sound pressure level, high dB(A) *4 | 51/52 |

NB: Designs and specifications are subject to change without notice.

*1 kW output values are nominal ratings based on 18°C water temperature, 35°C air at 60% RH.


*2 kW output values are nominal ratings based on 7°C water temperature, 35°C air at 60% RH.

*3 Low Temperature (CL) models can be engineered to chill to -5°C with sufficient Glycol solution to prevent freezing

*4 Sound pressure measured at 3m in decibels re 20 µPa.



INSTALLATION INSTRUCTIONS

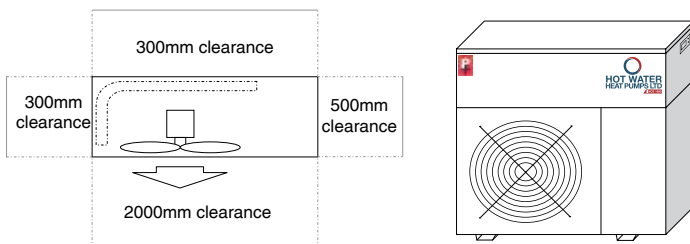

Why buy from Hot Water Heat Pumps Ltd


Back up and service: You can be assured of unprecedented after-sales service. We provide free telephone and email support on all products, for the life of the product, even if you're outside of the warranty period. With periodic maintenance, your Hot Water Heat Pumps Ltd's product will provide you with a lifetime of efficient water heating and cooling technology.

Warranty: All of our industrial water chiller models carry a comprehensive two year parts and labour warranty, including the compressor, evaporator coil, heat exchanger and refrigeration systems. The titanium tube within the heat exchanger is covered against corrosion for 10 years.



Safety first: Our water chillers are fitted with protection systems to prevent damage in the event of a malfunction. Such as a flow switch to ensure the chillers cannot operate without water flow and other refrigeration safeties. If a problem is identified, the unit automatically shuts down before damage can occur.

Energy efficient: Government agency EECA (Energy Efficiency Conservation Authority) has listed heat pumps as one of the most energy efficient forms of heating in New Zealand.

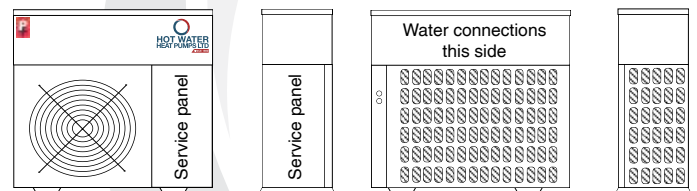

3 Corban Avenue, Henderson, Auckland 0612
 PO Box 21 586, Henderson, Auckland 0650
 Phone 09 838 9444 Fax 09 838 6223
 info@waterheating.co.nz

 **HOT WATER HEAT PUMPS LTD**
 Advancing Water Heat Pump Technology SINCE 1980