

U-Series 7GU27CL-3-2P Low Water Temperature Water Chiller

The 7GU27CL-3-2P Water Chiller is part of our Performance Plus range of models. It ensures a constant set temperature every time. Suitable for chilling brine/glycol down to 1°C.

Designed and engineered to perform all year round, even in New Zealand's harshest environments; the 7GU27CL-3-2P unit is made of heavy gauge galvanised steel cabinetry with a polyester powder coat finish which provides superior corrosion resistance. The evaporator coils aluminium fins are epoxy coated giving extra protection in coastal areas where the air is salt-laden. The coil fins are on rifled copper tubes for even better heat transfer.

Due to its high energy efficiency, the 7GU27CL-3-2P has an extremely low cost of operation.

IDEAL APPLICATION

- Water chillers
- Food processing
- Machinery cooling

PERFORMANCE PLUS FEATURES

- Built in drain tray
- Water flow switch activated
- Ozone friendly refrigerants
- Epoxy coated corrosion resistant evaporator coils
- Built in refrigeration safety switches
- Optional electronic reverse cycle de-ice control
- Easy to operate electronic controller with digital display
- TX valve for more efficient low ambient operation
- Compressor has built in internal and external overload



PERFORMANCE PLUS BENEFITS

- Easy to install and operate
- Low operating costs and high efficiency
- Environmentally friendly
- Durable and long life expectancy
- Engineered and built in New Zealand
- Automatically maintains any set temperature in all weather



Experience the best in water chiller technology



Advancing Water Heat Pump Technology SINCE 1980

U- Series 7GU27CL-3-2P

Technical Specifications

Cooling Capacity – kW *1	27
Cooling Capacity – kW *2	18
kW input	6.0
Power Supply	3 Phase + N & E
Circuit Breaker - 3 Pole D Curve	25 amps
Nominal compressor run amps	11 per phase
Fan full load amps	0.83 x2
Circulation pump amps	1.83 x2
Water connections	25mm female faucet
Dimensions LxWxH – mm	1750 x 560 x 1380
Weight – kg	185
Air volume @ high speed litre/second	2,000
Sound pressure level, high dB(A) *3	51/53
Onboard buffer tank size - L*4	Yes
Circulation Pump	Yes

NB: Designs and specifications are subject to change without notice.

*1 kW output values are nominal ratings based on 18°C water temperature.

*2 kW output values are nominal ratings based on 12°C water temperature.

*3 Sound pressure measured at 3m in decibels re 20 µPa.

*4 Not suitable for pressurized systems.

Why buy from Hot Water Heat Pumps Ltd

Back up and service: You can be assured of unprecedented after-sales service. We provide free telephone and email support on all products, for the life of the product, even if you're outside of the warranty period. With periodic maintenance, your Hot Water Heat Pumps Ltd's product will provide you with a lifetime of efficient water heating and cooling technology.




Warranty: All of our industrial water chiller models carry a comprehensive two year parts and labour warranty, including the compressor, evaporator coil, heat exchanger and refrigeration systems. The titanium tube within the heat exchanger is covered against corrosion for 10 years.



Safety first: Our water chillers are fitted with protection systems to prevent damage in the event of a malfunction. Such as a flow switch to ensure the chillers cannot operate without water flow and other refrigeration safeties. If a problem is identified, the unit automatically shuts down before damage can occur.

Energy efficient: Government agency EECA (Energy Efficiency Conservation Authority) has listed heat pumps as one of the most energy efficient forms of heating in New Zealand.

INSTALLATION INSTRUCTIONS

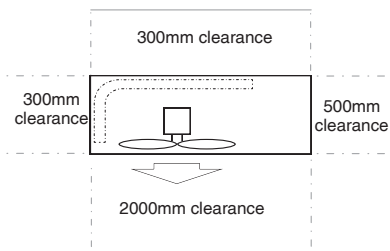

3 Corban Avenue, Henderson, Auckland 0612
 PO Box 21 586, Henderson, Auckland 0650
 Phone 09 838 9444 Fax 09 838 6223
 info@waterheating.co.nz

HOT WATER HEAT PUMPS LTD
 Advancing Water Heat Pump Technology SINCE 1980